





SINGLE-PHASE OPTOTHYRISTOR BRIDGE MODULE

MO20-63-12; MO20A-63-12

TICKET

Single-phase thyristor-diode bridge module with opto decoupling with thyristors control connected to “positive” output is intended for rectifying conversion of AC into pulsating DC voltage)

OVERALL DRAWING AND ELECTRIC CIRCUIT

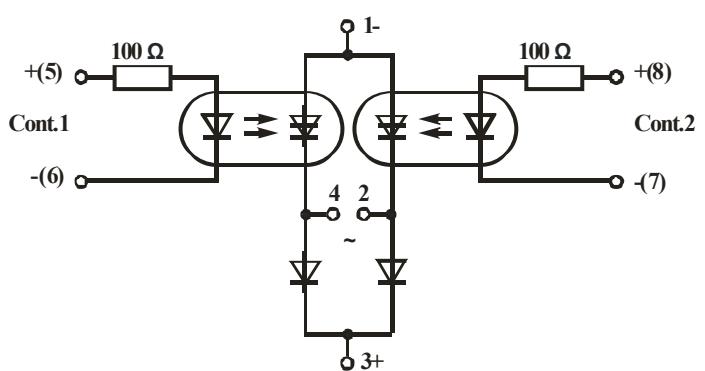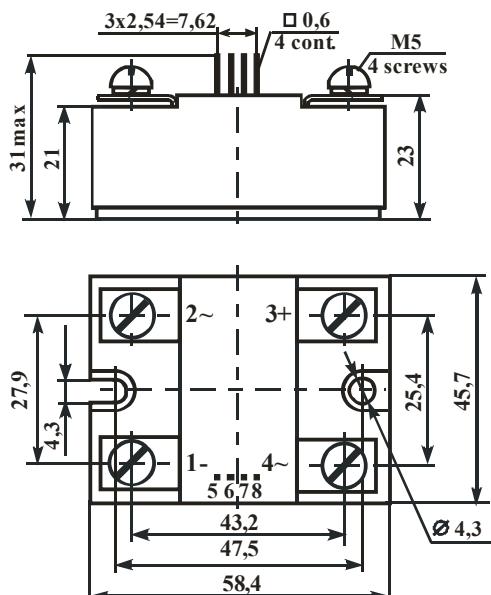

BASIC CHARACTERISTICS

T = 25 °C

Product name	Peak voltage in thyristor on-state / direct diode peak voltage, U _{TM} / U _{FM} , V	Bridge port current (closed state), I _D , mA		Open state voltage on control input U _{Gon} , V			Electric isolation at DC, U _{ISOL} , V	Isolation resistance between: power and controlling outputs/power outputs and radiator, R _{ISOL} , MΩ	Thermal transition-package radiator resistance R _{thic} , °C/W		
		I _{OUT} , A	U _{OUT} , V	min	max	I _{Gon} , mA			min	max	
		max		± 1.5	± 1200	3.0	4.2	10	4000	100 / 10	1.0
MO20-63-12	1.65	63		± 1.5	± 1200	3.0	4.2	10	4000	100 / 10	1.0
MO20A-63-12											1.3

MAXIMUM ALLOWABLE OPERATING MODES

Product name	Linear voltage (rms), U _{lin} , V		Average rectified module current, I _o , A		Non-repetitive surge DC I _{F(SM)} I _{T(SM)} , A		Control current I _G , mA	Critical rate of rise		Junction temperature, T _{VJ*} , °C	
								t, ms	open state current, (dI _T / dt) _{cr} , A/μs	closed state voltage, (dU _d / dt) _{cr} , V/μs	
	min	max	min	max	max	min		min	max	min	max
MO20-63-12	50	840	0.2	63	300	10	10	30	150	1000	-40
MO20A-63-12	12										+125

*the modules are designed for operating in the equipment with using of coolers supporting transition temperature in prescribed ranges

Precious metals are not contained

