
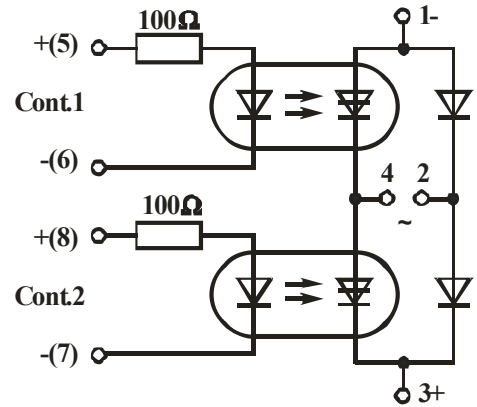


SINGLE-PHASE OPTOTHYRISTOR BRIDGE MODULE MO21-63-16; MO21A-63-16

TICKET

Single-phase thyristor-diode bridge module with opto decoupling with thyristors control connected to “positive” and “negative” outputs is intended for rectifying conversion of AC into pulsating DC voltage).

OVERALL DRAWING AND ELECTRIC CIRCUIT

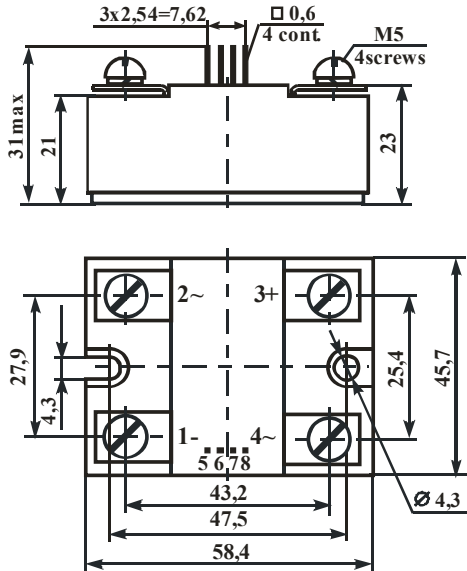

BASIC CHARACTERISTICS

T = 25 °C

Product name	Peak voltage in thyristor on-state / direct diode peak voltage, U_{TM} / U_{FM} , V		Bridge port current (closed state), I_D , mA		Open state voltage on control input U_{Gon} , V		Electric isolation at DC, U_{ISOL} , V	Isolation resistance between: power outputs and controlling outputs/ power outputs and radiator, R_{ISOL} , MΩ	Thermal resistance transition-housing radiator R_{thic} , °C/W		
	max	I_{OUT} , A	max	U_{OUT} , V	min	max			I_{Gon} , mA	max	max
MO21-63-16	1.65	63	± 1.5	± 1600	3.0	4.2	10	4000	100 / 10	1.0	1.3
MO21A-63-16											

MAXIMUM ALLOWABLE OPERATING MODES

Product name	Linear voltage (rms), U_{lin} , V		Average rectified module current, I_o , A		Non-repetitive surge DC $I_{F(SM)}$ $I_{T(SM)}$, A		Control current I_G , mA		Critical rate of rise		Junction temperature, T_{VJ}^* , °C	
	min	max	min	max	max	t, ms	min	max	open state current, $(di_T / dt)_{cr}$, A/μs	closed state voltage, $(du_d / dt)_{cr}$, V/μs	min	max
									150	1000		
MO21-63-16	50	1150	0.2	63	300	10	10	30	150	1000	-40	+125
MO21A-63-16	12											

*the modules are designed for operating in the equipment with using of coolers supporting transition temperature in prescribed ranges

Precious metals are not contained